

PART #: A0406 REV: SHEET 1 OF 1





| PART # | T/C TYPE | CONT. #3 MATERIAL | CONT. #4 MATERIAL | CONT. #5 MATERIAL | CONT. #6 MATERIAL | CONNECTOR |
|-----------|-------------|----------------------|----------------------|----------------------|----------------------|-----------|
| A0406-1-W | J | CONSTANTAN | IRON | CONSTANTAN | IRON | BLACK |
| A0406-2-W | K | ALUMEL | CHROMEL | ALUMEL | CHROMEL | YELLOW |
| A0406-3-W | C | 426 | 405 | 426 | 405 | RED |
| A0406-4-W | Е | CONSTANTAN | CHROMEL | CONSTANTAN | CHROMEL | PURPLE |



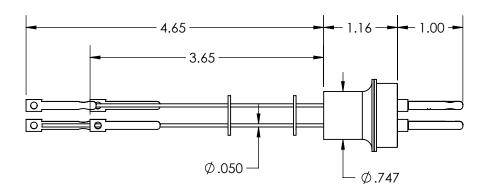

| UNLESS OTHERWISE SPECIFIED: | QUOTATION # | • | | APPRO' | VED |
|---|--------------------|------|------------|--|------------|
| DIMENSIONS ADE IN INICIES | | NAME | DATE | MPF PROD | OUCTS INC. |
| DIMENSIONS ARE IN INCHES [] DIMENSIONS ARE IN MILLIMETERS FOR REFERENCE | DRAWN: | AB | 05/06/2004 | TITLE: | |
| TOLERANCES: | CHECKED: | RD | 05/06/2004 | - | SUDIE |
| ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL + 030 (76) | APPROVED: | AB | 05/06/2004 | THERMOCO 2x PAI | |
| TWO PLACE DECIMAL ± .030 [.76] THREE PLACE DECIMAL ± .015 [.381] | APPLICATION | | MINI CONN | | |
| ALL DIAMETERS CONCENTRIC WITHIN .005 [.127] REMOVE ALL BURRS AND SHARP EDGES | USED ON: BASED ON: | | WELDABLE | | |
| MIN SURFACE FINISH: Ra 63 µin Ra 1.6 µm N7 | | | | | |
| THIRD ANGLE PROJECTION: | MOUNT: WFIGHT: | | | | |
| | | = | 1. | DWG NO: A0406 | REV: |
| 1 4 7 | WELDABLE | 0.09 | | Turnel 14 17 0017 0 40 47 A14 DV: FMC1 | |