COAXIAL

Coaxial is the description for electrical feedthroughs with parallel and concentric conductor paths, and with the inner most conductor path electrically isolated from the vacuum flange. Grounded Shield versions have one isolated path, and Floating Shield versions have two. Coaxial feedthroughs are single-ended or double-ended, and all types include air-side connectors.

MPF offers several mounting options for coaxial feedthroughs: Weldable, Quick Flange (QF), and Conflat Flange (CF). Most designs are also configured for Baseplate and NPT style adapters. Custom adapters, plates and flange configurations are available by request.

BNC and MHV

Bayonet Naval Connector (BNC) feedthroughs are very popular due to their quick connect coupling and compact overall size. BNC series are commonly used for low power transmission and are rated to 500 Volts DC.

Miniature High Voltage (MHV) feedthroughs are very similar to the BNC series, but the MHV series is capable of handling much higher power transmission. Although they are very similar in design, MHV and BNC connectors are not compatible. MHV feedthroughs and mating connectors are rated to 5000 Volts DC.



SHV-5 and SHV-10

Safe High Voltage (SHV) feedthroughs are like the MHV series, with the primary difference being the pin and contact configuration. SHV cable connectors have a recessed female contact which helps prevent shock hazards when the connector is disengaged.

This recessed contact design is an improvement over the MHV design, and becomes increasingly important in higher power applications. The SHV-5 and SHV-10 series are rated for up to 5 Amps and 5000 or 10,000 Volts DC respectively. Both are offered in single and double-ended versions.




SHV-20 and SHV-B

SHV-20 feedthroughs are rated for 20,000 Volts DC and up to 15 Amps. These specially designed interfaces incorporate standard high voltage contacts, and are designed for increased performance in pulsed high voltage applications.

SHV-B feedthroughs are designed for bakeout at higher temperatures than the other SHV series. The air-side cable connectors included with these feedthroughs utilize a ceramic dielectric material. SHV-B feedthroughs and connectors are rated for 7500 Volts DC and up to 3 Amps.















Type N and SMA - Standard

Type N feedthroughs combine the most popular medium-sized high frequency connector with a feedthrough designed to perform in high and ultra-high vacuum applications. The standard Type N series is suitable for use to 1 GHz. Type N feedthroughs and mating connectors are rated for 500 Volts DC and up to 3 Amps.

Subminiature Type-A (SMA) feedthroughs are compact designs suited for medium-to-high frequency applications. Similar to the Type N series, the standard SMA series is suitable for use to 1 GHz. SMA feedthroughs and connectors are rated for 700 Volts DC and up to 1 Amp. The floating shield version is rated to 2500 Volts DC.



Type N and SMA - 50 Ohm - Matched Impedance

Both Type N and SMA feedthroughs are also offered with increased signal transmission performance. These high-vacuum feedthrough designs have been engineered for improved RF performance in high frequency applications up to 8 GHz.

Unlike the standard Type N and SMA feedthroughs which are intended for UHV applications, these matched impedance versions utilize a Teflon dielectric spacer. This design parameter optimizes electrical performance but requires consideration in some vacuum environments.

High Performance SMA rated to 18 Ghz also available.



Microdot and Between Series

Microdot style feedthroughs are the smallest UHV design with a threaded connector interface. This connector style is commonly used in vacuum coating applications, particularly in the construction of crystal sensor deposition monitors.

Crystal Sensor assemblies often utilize a BNC-Microdot 'between series' feedthrough, which is designed with a BNC connection on the air-side and a Microdot connection on the vacuum-side. Standard configurations available.

Type N to SMA feedthroughs are typically used in Beam Position Monitor (BPM) applications. Single, double, and custom configurations are available.



Operating Conditions

The electrical and thermal ratings specified are safe operating limits determined by various factors including material properties, mechanical design, and the intended operating environment. All electrical ratings are based on operation with one side in dry atmosphere and the other side in vacuum of 1 x 10^{-4} Torr maximum pressure. Temperature ratings for various mounting options may reduce the operating range of an assembly. All assemblies have a maximum thermal gradient of 25°C per minute and may be damaged if this limit is exceeded.







COAXIAL

Section 5:

Section	Туре	Sub-type	Grounded / Floating Shield	Single / Double Ended	
5.1	BNC		Grounded	Single / Double	
J.1	DIVC		Floating	Single / Double	
5.2	MHV		Grounded	Single / Double	
5.2	IVITIV		Floating	Single / Double	
		SHV-5	Grounded	Single / Double	
		SHV-5	Floating	Single	
5.3	SHV	SHV-10	Grounded	Single / Double	
		SHV-20	Grounded	Single	
		SHV-B	Grounded	Single	
5.4	Type N	Standard	Grounded	Single	
5.4	Type N	High Frequency	Grounded	Single / Double	
		Standard	Grounded	Single	
5.5	SMA	Standard	Floating	Single	
		High Frequency	Grounded	Single / Double	
5.6	Microdot		Grounded	Single	
E 7	Between	BNC to Microdot	Grounded	Double	
5.7	Series	Type N to SMA	Grounded	Double	







Contents

Electrical Rating	Thermal Rating	Conductor	Impedance	Pages	
Voltage: 500 Volts DC Current: 3 Amps	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	304 Stainless Steel	Non-constant	124 125	
Voltage: 2500 Volts DC Current: 3 Amps	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	304 Stainless Steel	Non-constant	124-135	
Voltage: 5000 Volts DC Current: 3 Amps	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	304 Stainless Steel	Non-constant	400 440	
Voltage: 2500 Volts DC Current: 3 Amps	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	304 Stainless Steel	Non-constant	136-146	
Voltage: 5000 Volts DC Current: 5 Amps	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	Nickel	Non-constant		
Voltage: 2500 Volts DC Current: 5 Amps	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	Nickel	Non-constant		
Voltage: 10,000 Volts DC Current: 5 Amps	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	Nickel	Non-constant	147-163	
Voltage: 20,000 Volts DC Current: 15 Amps	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	Nickel	Non-constant		
Voltage: 7500 Volts DC Current: 3 Amps	Feedthrough: -200 to 450°C Air-side Connector: -200 to 300°C	304 Stainless Steel	Non-constant		
Voltage: 500 Volts DC Current: 3 Amps	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	304 Stainless Steel	Non-constant	104 100	
Voltage: 500 Volts DC Current: 3 Amps	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	304 Stainless Steel	50 Ohms	164-166	
Voltage: 700 Volts DC Current: 1 Amp	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	304 Stainless Steel	Non-constant		
Voltage: 2500 Volts DC Current: 1 Amp	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	304 Stainless Steel	Non-constant	167-171	
Voltage: 700 Volts DC Current: 1 Amp	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	304 Stainless Steel	50 Ohms		
Voltage: 500 Volts DC Current: 2 Amps	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	Molybdenum	Non-constant	172	
Voltage: 500 Volts DC Current: 2 Amps	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	304 Stainless Steel	Non-constant	470 477	
Voltage: 500 Volts DC Current: 1 Amp	Feedthrough: -200 to 450°C Air-side Connector: -65 to 165°C	304 Stainless Steel	Non-constant	173-177	








Air-side Connector Included

Grounded Shield — Single-ended WELDABLE






PART #	PRICE
A0059-1-W	32.00
A0059-2-W (w/o connector)	25.00

${\bf Grounded\ Shield\ -\ Double-ended}$

WELDABLE

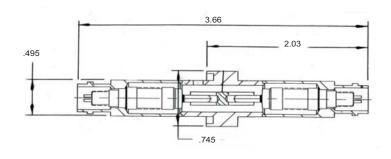



PART #	PRICE
A0471-1-W	165.00











BNC

500 Volts DC / 3 Amps Air-side Connector Included

${\bf Grounded\ Shield\ -\ Single-ended\ }$

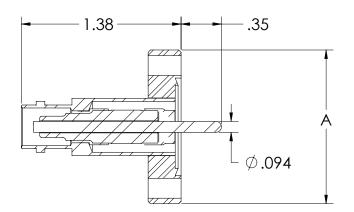



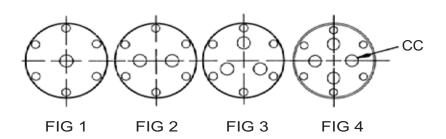

PINS	FIG	CF FLANGE	Α	CC	PART #	PRICE
1	1	CF16	1.33		A0237-1-CF	70.00
1	1	CF40	2.75		A0289-1-CF	90.00
2	2	CF40	2.75	.75	A0291-1-CF	135.00
3	3	CF40	2.75	.95	A0293-1-CF	180.00
4	4	CF40	2.75	.95	A0295-1-CF	225.00













Air-side Connector Included

Grounded Shield — Double-ended

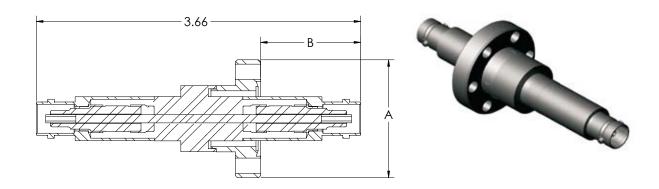



PINS	FIG	CF FLANGE	Α	В	CC	PART #	PRICE
1	1	CF16	1.33	1.14		A0472-1-CF	220.00
1	1	CF40	2.75	1.58		A0473-1-CF	230.00
2	2	CF40	2.75	1.58	.75	A0473-3-CF	400.00
3	3	CF50	3.38	1.58	.95	A0473-5-CF	580.00
4	4	CF63	4.50	1.58	.95	A7231-1-CF	740.00











BNC

500 Volts DC / 3 Amps *Air-side Connector Included*

${\bf Grounded\ Shield\ -\ Single-ended\ }$

QUICK FLANGE

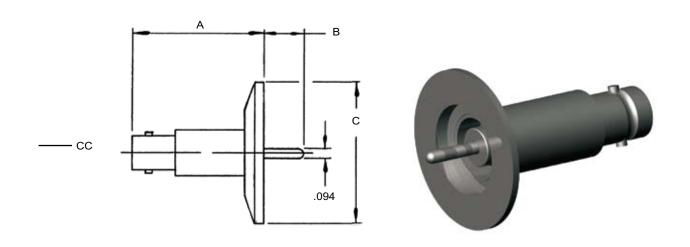

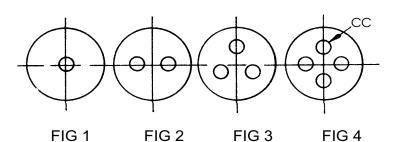

PINS	FIG	Α	В	С	CC	PART #	PRICE
1	1	1.43	.30	1.18		A0476-1-QF	70.00
1	1	1.33	.40	2.16		A0476-2-QF	90.00
2	2	1.33	.40	2.16	.75	A0476-3-QF	125.00
3	3	1.33	.40	2.95	.95	A0476-4-QF	180.00
4	4	1.33	.40	2.16	.75	A6984-1-QF	225.00
4	4	1.33	.40	2.95	.95	A0476-5-QF	225.00













BNC 500 Volts DC / 3 Amps *Air-side Connector Included*

Grounded Shield — Double-ended QUICK FLANGE

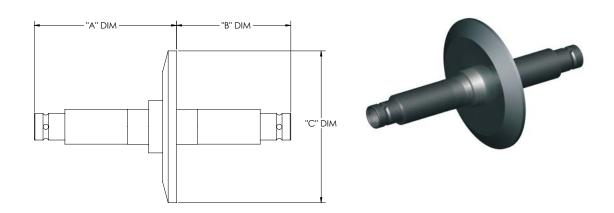

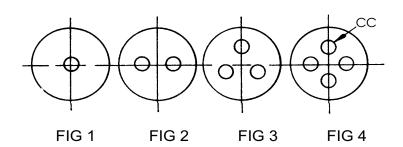

PINS	FIG	Α	В	С	CC	PART#	PRICE
1	1	1.13	2.53	1.18		A0479-1-QF	220.00
1	1	2.03	1.63	2.16		A0478-3-QF	230.00
2	2	2.03	1.63	2.95	.75	A0478-5-QF	400.00
3	3	2.03	1.63	2.95	.95	A0478-7-QF	580.00
4	4	2.03	1.63	2.95	.95	A7111-1-QF	740.00










BNC

500 Volts DC / 3 Amps

Air-side Connector Included

Grounded Shield

1" BASEPLATE

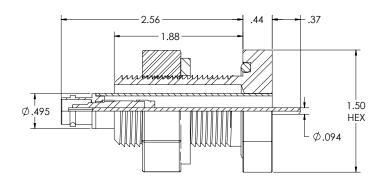




PART #	PRICE
A0482-2-BP	175.00

Grounded Shield — Double-ended

1" BASEPLATE

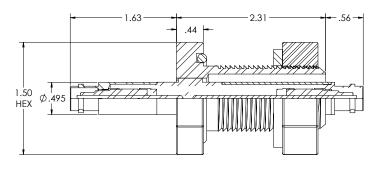



PART#	PRICE
Δ0/18/1-RP	325.00

See Section 7 for connectors, wiring, and other accessories.











Air-side Connector Included

Floating Shield

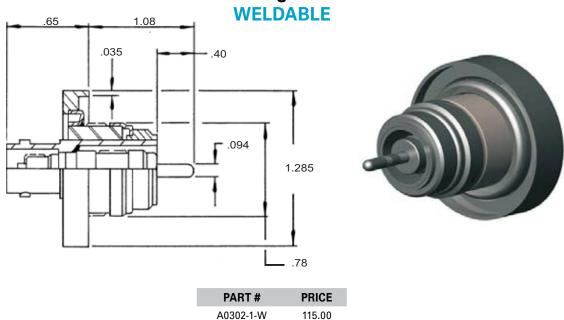

Floating Shield

WELDABLE

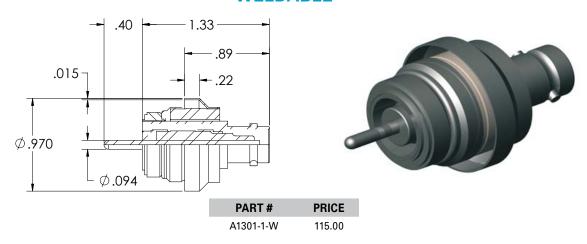










Air-side Connector Included

Floating Shield — Double-ended WELDABLE



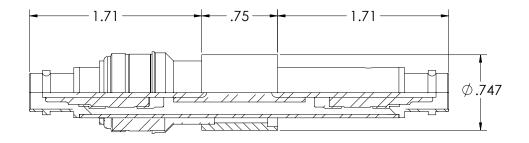

PART#	PRICE
A0466-1-W	270.00













BNC 500 Volts DC / 3 Amps *Air-side Connector Included*

Floating Shield — Single-ended

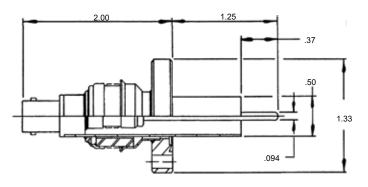



PART #	PRICE
A0310-1-CF	160.00





PART#	PRICE
Δ0304-1-CF	160.00










Air-side Connector Included

Floating Shield — Double-ended CONFLAT FLANGE



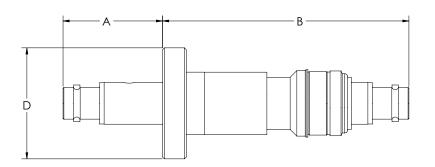

PINS	CF FLANGE	Α	В	D	PART #	PRICE
1	CF16	1.21	2.96	1.33	A0474-1-CF	320.00
1	CF40	1.66	2.51	2.75	A0475-1-CF	325.00












Air-side Connector Included

Floating Shield — Single-ended QUICK FLANGE






PINS	Α	В	С	PART #	PRICE
1	2.59	0.67	1.18	A0315-1-QF	160.00
1	2.09	1.17	2.16	A0315-3-QF	160.00

Floating Shield — Double-ended

QUICK FLANGE

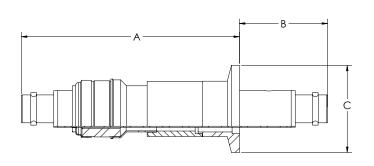



PINS	Α	В	С	PART #	PRICE
1	2.96	1.21	1.18	A0480-1-QF	320.00
1	2.46	1.71	2.16	A0481-1-QF	325.00










Air-side Connector Included

Floating Shield

1" BASEPLATE

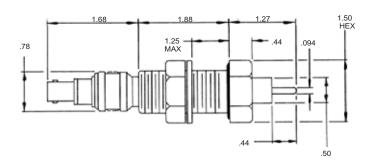




PART #	PRICE
A0485-1-BP	260.00

Floating Shield — Double-ended

1" BASEPLATE

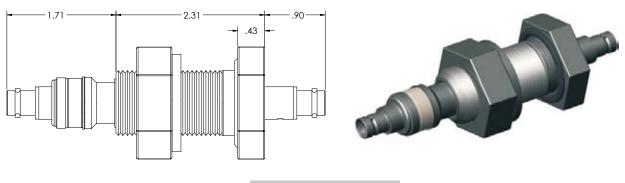

PART #	PRICE
Λ0/197_1_RP	415.00












5000 Volts DC / 3 Amps

Air-side Connector Included

Grounded Shield


WELDABLE

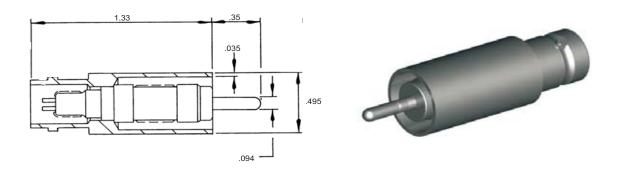

PART#	PRICE
A0058-1-W	32.00
A0058-2-W (w/o connector)	25.00

Grounded Shield — Double-ended

WELDABLE

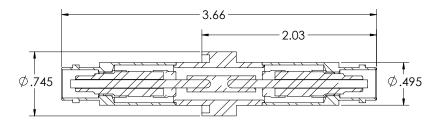



PART #	PRICE
Δ0471-2-W	170.00













5000 Volts DC / 3 Amps

Air-side Connector Included

${\bf Grounded\ Shield\ -\ Single-ended\ }$

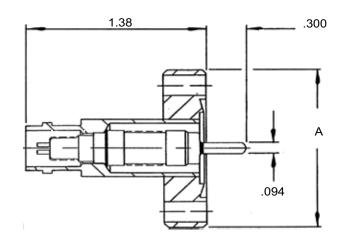



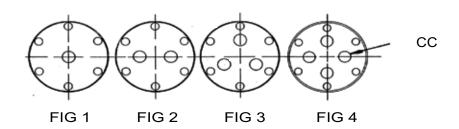

PINS	CF FLANGE	Α	CC	PART #	PRICE
1	CF16	1.33		A0238-1-CF	80.00
1	CF40	2.75		A0290-1-CF	90.00
2	CF40	2.75	.75	A0292-1-CF	135.00
3	CF40	2.75	.95	A0294-1-CF	190.00
4	CF40	2.75	.95	A0296-1-CF	245.00













5000 Volts DC / 3 Amps

Air-side Connector Included

Grounded Shield — Double-ended

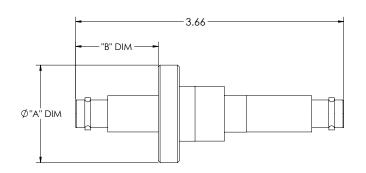





PINS	FIG	CF FLANGE	Α	В	CC	PART #	PRICE
1	1	CF16	1.33	1.13		A0472-2-CF	225.00
1	1	CF40	2.75	1.58		A0473-2-CF	235.00
2	2	CF40	2.75	1.58	.75	A0473-4-CF	425.00
3	3	CF50	3.38	1.58	.95	A0473-6-CF	615.00










5000 Volts DC / 3 Amps

Air-side Connector Included

Grounded Shield — Single-ended

QUICK FLANGE






PINS	Α	В	С	CC	PART #	PRICE
1	1.43	.25	1.18		A0477-1-QF	85.00
1	1.33	.35	2.16		A0477-2-QF	90.00
2	1.33	.35	2.16	.75	A0477-3-QF	135.00
3	1.33	.35	2.95	.95	A0477-4-QF	190.00
4	1.33	.35	2.16	.75	A6984-2-QF	245.00
4	1.33	.35	2.95	.95	A0477-5-QF	245.00

Grounded Shield — **Double-ended**

QUICK FLANGE





PINS	Α	CC	PART #	PRICE
1	1.18		A0479-2-QF	225.00
1	2.16		A0478-4-QF	235.00
2	2.16	.75	A0478-10-QF	425.00
3	2.95	.95	A0478-8-QF	615.00

See Section 7 for connectors, wiring, and other accessories.










5000 Volts DC / 3 Amps

Air-side Connector Included

Grounded Shield — Single-ended


1" BASEPLATE

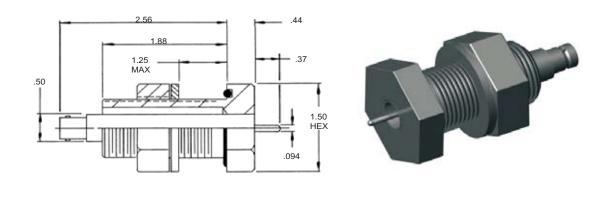

PRICE PART# A0482-1-BP 175.00

Grounded Shield — Double-ended

1" BASEPLATE

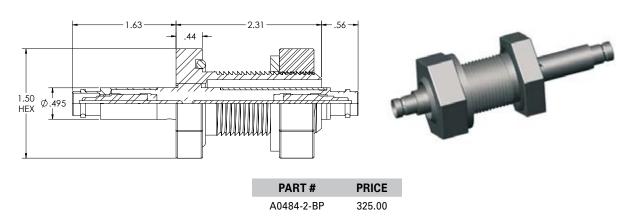










5000 Volts DC / 3 Amps

Air-side Connector Included


Floating Shield — Single-ended

WELDABLE





PART #	PRICE
A1301-3-W	120.00

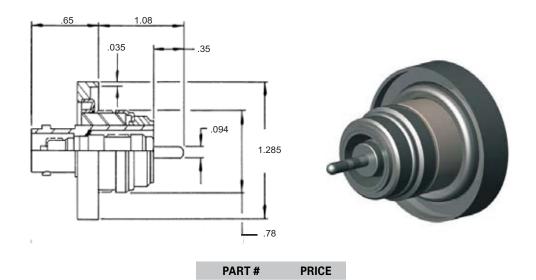



A0303-1-W







120.00




5000 Volts DC / 3 Amps

Air-side Connector Included

Floating Shield — Double-ended

WELDABLE



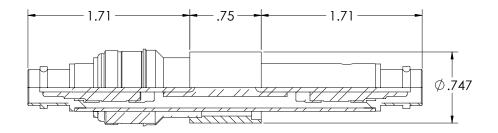

PART #	PRICE
A0466-2-W	280.00










5000 Volts DC / 3 Amps


Air-side Connector Included

Floating Shield — Single-ended

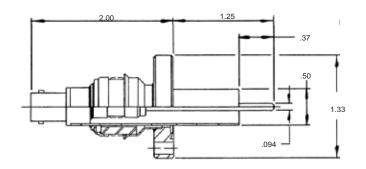



PART #	PRICE
A0311-1-CF	175.00





PART#	PRICE
Δ0305-1-CF	175.00












5000 Volts DC / 3 Amps

Air-side Connector Included

${\bf Floating\ Shield\ -\ Double-ended}$



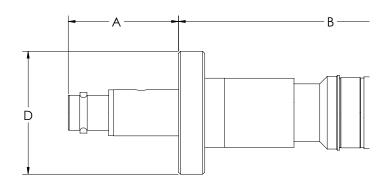

PINS	CF FLANGE	Α	В	D	PART #	PRICE
1	CF16	1.21	2.96	1.33	A0474-2-CF	335.00
1	CF40	1.66	2.51	2.75	A0475-2-CF	360.00










5000 Volts DC / 3 Amps

Air-side Connector Included

Floating Shield — Single-ended

QUICK FLANGE






PINS	Α	В	D	PART #	PRICE
1	2.59	.67	1.18	A0316-1-QF	175.00
1	2.09	1.17	2.16	A0316-3-QF	175.00

Floating Shield — Double-ended

QUICK FLANGE

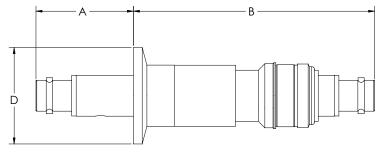



PINS	Α	В	D	PART #	PRICE
1	1.21	2.96	1.18	A0480-2-QF	335.00
1	1.71	2.46	2.16	A0481-2-QF	360.00












5000 Volts DC / 3 Amps

Air-side Connector Included


Floating Shield — Single-ended

1" BASEPLATE

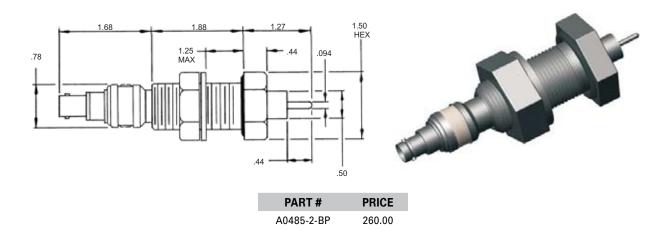

Floating Shield — Double-ended

1" BASEPLATE

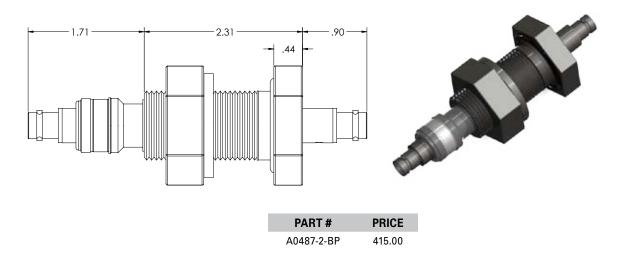










SHV-5

5000 Volts DC / 5 Amps

Air-side Connector Included


Grounded Shield — Recessed

WELDABLE

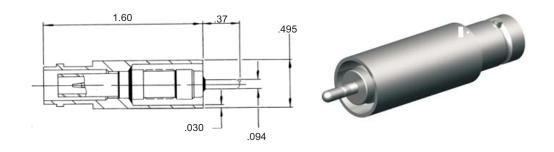

PART #	PRICE
A0152-1-W	60.00

Grounded Shield — Exposed WELDABLE





PART #	PRICE
A0328-1-W	75.00












SHV-5


5000 Volts DC / 5 Amps

Air-side Connector Included

Grounded Shield — Recessed

CONFLAT FLANGE









PINS	FIG	Α	В	С	CC	PART#	PRICE
1	1	1.65	.32	1.33		A0330-1-CF	110.00
1	1	1.65	.32	2.75		A0331-1-CF	130.00
2	2	1.65	.32	2.75	.75	A0332-1-CF	200.00
3	3	1.65	.32	2.75	.95	A0333-1-CF	290.00
4	4	1.65	.32	2.75	.95	A0334-1-CF	365.00

${\bf Grounded\ Shield-Exposed}$

CONFLAT FLANGE







PINS	FIG	Α	В	С	CC	PART #	PRICE
1	1	1.08	.86	1.33		A0335-1-CF	125.00
1	1	1.08	.86	2.75		A0336-1-CF	145.00
2	2	1.08	.86	2.75	.75	A0337-1-CF	230.00
3	3	1.08	.86	2.75	.95	A0338-1-CF	335.00
4	4	1.08	.86	2.75	.95	A0339-1-CF	430.00

See Section 7 for connectors, wiring, and other accessories.












SHV-5


5000 Volts DC / 5 Amps

Air-side Connector Included

Grounded Shield — Recessed

QUICK FLANGE









PINS	FIG	Α	В	С	CC	PART#	PRICE
1	1	1.70	.27	1.18		A0340-1-QF	110.00
1	1	1.60	.37	2.16		A0341-1-QF	120.00
2	2	1.60	.37	2.16	.75	A0342-1-QF	185.00
3	3	1.60	.37	2.95	.95	A0343-1-QF	320.00
4	4	1.60	.37	2.16	.75	A6984-3-QF	365.00
4	4	1.60	.37	2.95	.95	A0344-1-QF	365.00

Grounded Shield — Exposed QUICK FLANGE







PIN	S FIG	Α	В	С	CC	PART #	PRICE
1	1	1.13	.81	1.18		A0345-1-QF	125.00
1	1	1.03	.91	2.16		A0346-1-QF	145.00
2	2	1.03	.91	2.16	.75	A0347-1-QF	230.00
3	3	1.03	.91	2.95	.95	A0348-1-QF	335.00
4	4	1.03	.91	2.95	.95	A0349-1-QF	430.00

See Section 7 for connectors, wiring, and other accessories.










SHV-5 5000 Volts DC / 5 Amps

Air-side Connector Included

Grounded Shield — Double-ended WELDABLE



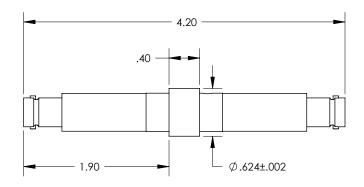

PART #	PRICE
A0858-1-W	220.00














SHV-5


5000 Volts DC / 5 Amps

Air-side Connector Included

Grounded Shield — Double-ended












Fig. 2




Fig. 3

FIG	PINS	Ø B.C.	"A" DIM	"B" DIM	PART #	PRICE
1	1		1.40	.285	A0472-5-CF	275.00
2	1		1.85	.500	A0473-7-CF	285.00
3	2	.75	1.85	.500	A0473-8-CF	440.00












SHV-5


5000 Volts DC / 5 Amps

Air-side Connector Included

Grounded Shield — Double-ended

QUICK FLANGE

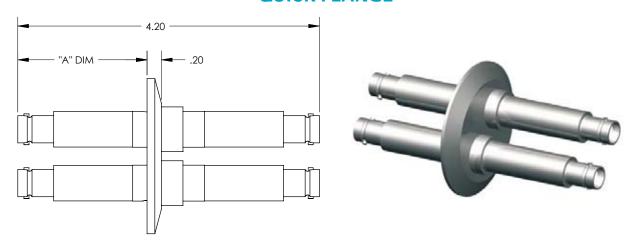








Fig. 2




Fig. 3

FIG	PINS	Ø B.C.	"A" DIM	PART #	PRICE
1	1		1.80	A8271-1-QF	275.00
2	2	.75	1.80	A0859-1-QF	430.00
3	2	.90	1.90	A6974-1-QF	440.00










SHV-5 5000 Volts DC / 5 Amps

Air-side Connector Included

Floating Shield — Single-ended WELDABLE



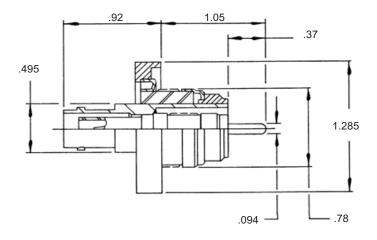

PART #	PRICE
A0329-1-W	150.00












SHV-10

10,000 Volts DC / 5 Amps

Air-side Connector Included

Grounded Shield — Recessed


WELDABLE

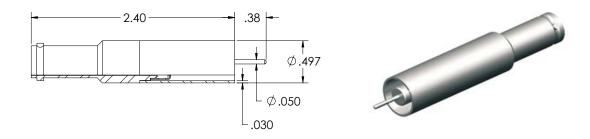

TYPE	PART #	PRICE
RECESSED	A1499-1-W	140 00

Grounded Shield — Exposed

WELDABLE

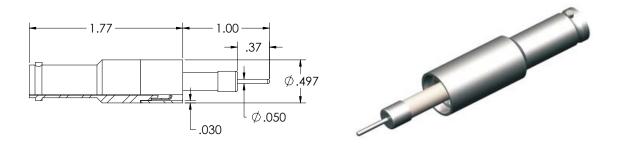

TYPE	PART #	PRICE
EXPOSED	A1497-1-W	155.00









SHV-10

10,000 Volts DC / 5 Amps Air-side Connector Included

Grounded Shield — Recessed


CONFLAT FLANGE













PINS	FIG	D	CC	PART #	PRICE
1	1	1.33 / CF16		A1600-1-CF	180.00
1	1	2.75 / CF40		A1600-2-CF	190.00
2	2	2.75 / CF40	.75	A1600-3-CF	345.00
3	3	2.75 / CF40	.75	A1600-4-CF	500.00
4	4	2 75 / CF40	95	A1600-5-CF	650.00

Grounded Shield — Exposed


CONFLAT FLANGE













PINS	FIG	D	CC	PART #	PRICE
1	1	1.33 / CF16		A1601-1-CF	195.00
1	1	2.75 / CF40		A1601-2-CF	205.00
2	2	2.75 / CF40	.75	A1601-3-CF	360.00
3	3	2.75 / CF40	.75	A1601-4-CF	520.00
4	4	2.75 / CF40	.95	A1601-5-CF	680.00

See Section 7 for connectors, wiring, and other accessories.












SHV-10 10,000 Volts DC / 5 Amps Air-side Connector Included


Grounded Shield — Recessed

QUICK FLANGE

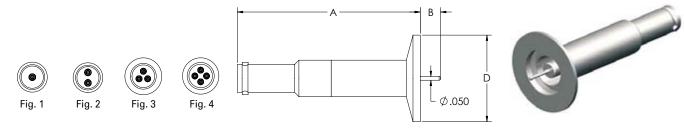

PINS	FIG	Α	В	D	CC	PART#	PRICE
1	1	2.49	.28	1.18 / QF16		A1602-1-QF	180.00
1	1	2.39	.28	2.16 / QF40		A1602-2-QF	190.00
2	2	2.39	.28	2.16 / QF40	.75	A1602-3-QF	345.00
3	3	2.39	.28	2.95 / QF50	.75	A1602-4-QF	500.00
4	4	2.39	.28	2.95 / QF50	.95	A1602-5-QF	650.00

Grounded Shield — Exposed

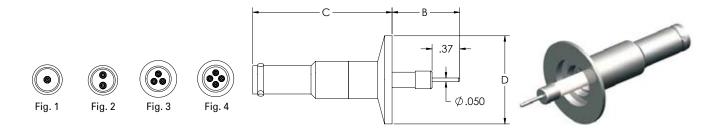

PINS	FIG	В	С	D	CC	PART #	PRICE
1	1	1.87	.90	1.18 / QF16		A1603-1-QF	195.00
1	1	1.77	1.00	2.16 / QF40		A1603-2-QF	205.00
2	2	1.77	1.00	2.16 / QF40	.75	A1603-3-QF	360.00
3	3	1.77	1.00	2.95 / QF50	.75	A1603-4-QF	520.00
4	4	1.77	1.00	2.95 / QF50	.95	A1603-5-QF	580.00












SHV-10 10,000 Volts DC / 5 Amps Air-side Connector Included

Grounded Shield — Double-ended WELDABLE



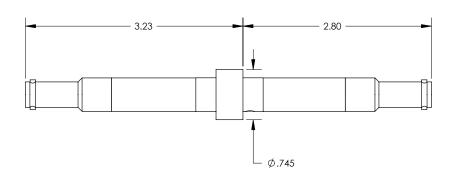

PART #	PRICE
A2613-3-W	295.00













10,000 Volts DC / 5 Amps Air-side Connector Included

Grounded Shield — Double-ended

CONFLAT FLANGE












Fig. 2




Fig. 3

FIG	PINS	Ø B.C.	"A" DIM	"B" DIM	"C" DIM	PART #	PRICE
1	1		3.73	2.30	.285	A8272-1-CF	345.00
2	1		3.28	2.75	.500	A8272-2-CF	355.00
3	2	.80	3.28	2.75	.500	A8272-3-CF	600.00










SHV-10 10,000 Volts DC / 5 Amps *Air-side Connector Included*

Grounded Shield — Double-ended

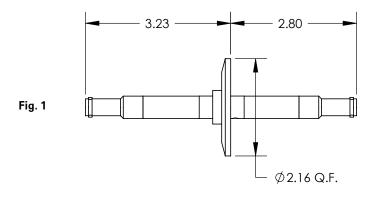



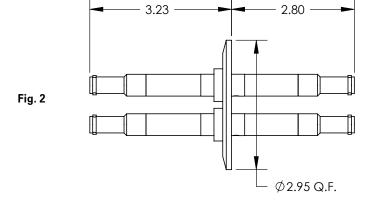


FIG	PINS	PART #	PRICE
1	1	A8273-1-QF	355.00
2	2	A8273-2-QF	600.00












20,000 Volts DC / 15 Amps

Air-side Connector Included

Grounded Shield — Recessed

WELDABLE

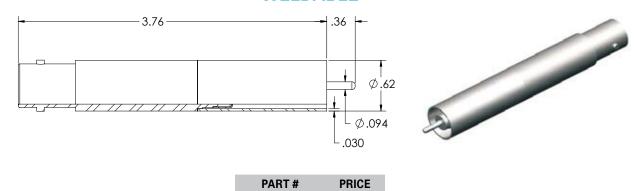


195.00

Grounded Shield — Exposed

A0701-1-W

WELDABLE

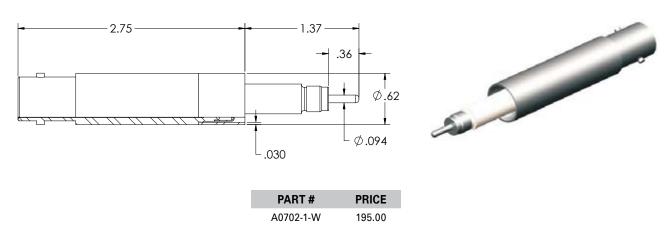















20,000 Volts DC / 15 Amps *Air-side Connector Included*

Grounded Shield — Recessed and Exposed

CONFLAT FLANGE

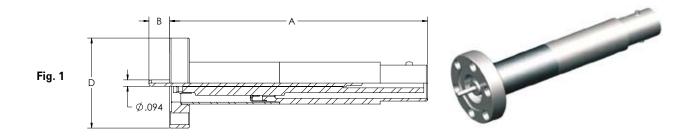

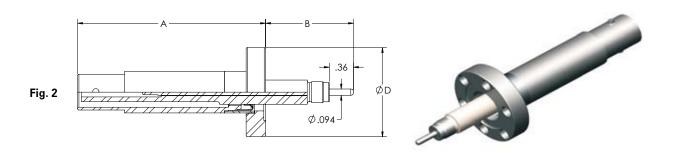

PINS	FIG	TYPE	Α	В	D	CC	PART #	PRICE
1	1	RECESSED	3.80	.32	1.33 / CF16		A0703-1-CF	250.00
1	1	RECESSED	3.80	.32	2.75 / CF40		A2095-1-CF	260.00
2	1	RECESSED	3.80	.32	2.75 / CF40	.95	A2300-1-CF	505.00
1	2	EXPOSED	2.80	1.32	1.33 / CF16		A0704-1-CF	250.00
1	2	EXPOSED	2.80	1.32	2.75 / CF40		A1909-1-CF	260.00
2	2	EXPOSED	2.80	1.32	2.75 / CF40	.95	A2099-1-CF	505.00













20,000 Volts DC / 15 Amps *Air-side Connector Included*

Grounded Shield — Recessed and Exposed

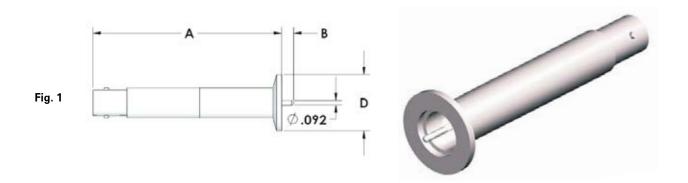

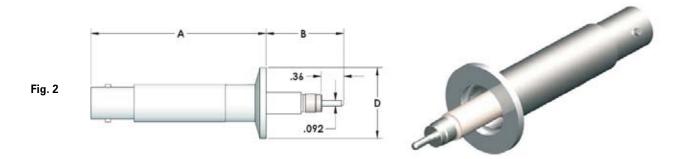

PINS	FIG	TYPE	Α	В	D	CC	PART #	PRICE
1	1	RECESSED	3.85	.27	1.18 / QF16		A2096-1-QF	250.00
1	1	RECESSED	3.80	.37	2.16 / QF40		A2096-2-QF	255.00
2	2	RECESSED	3.80	.37	2.95 / QF50	.95	A2302-1-QF	505.00
1	1	EXPOSED	2.85	1.27	1.18 / QF16		A2094-1-QF	250.00
1	1	EXPOSED	2.75	1.37	2.16 / QF40		A2094-2-QF	255.00
2	2	EXPOSED	2.75	1.37	2.95 / QF50	.95	A2301-1-QF	505.00











SHV-B 7500 Volts DC / 3 Amps Bakeable Connector

Air-side Connector Included

WELDABLE

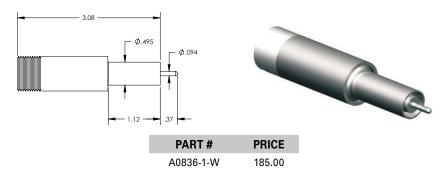


CONFLAT FLANGE

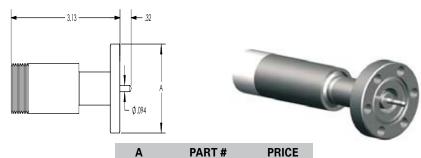

Α	PART #	PRICE
1.33	A1051-1-CF	225.00
2.75	A1051-2-CF	230.00

QUICK FLANGE

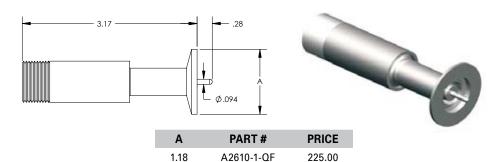

A2611-2-QF









2.16


230.00



TYPE-N


500 Volts DC / 3 Amps Air-side Connector Included

WELDABLE






TYPE	PART #	PRICE
SINGLE-ENDED	A0654-1-W	120.00





TYPE	PART #	PRICE
SINGLE-ENDED / 50 Ohms	A0655-1-W	350.00





TYPE	PART #	PRICE
DOUBLE-ENDED	A0659-1-W	255.00










TYPE-N


500 Volts DC / 3 Amps Air-side Connector Included

CONFLAT FLANGE






TYPE	PART #	PRICE
SINGLE-ENDED	Δ1706-1-CF	180 00

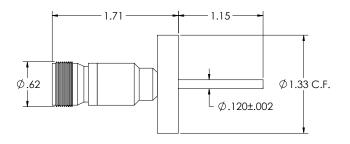



TYPE	PART#	PRICE
SINGLE-ENDED / 50 Ohms	A2714-1-CF	445.00





TYPE	PART#	PRICE
DOUBLE-ENDED	A2262-1-CF	315 00

See Section 7 for connectors, wiring, and other accessories.











TYPE-N 500 Volts DC / 3 Amps *Air-side Connector Included*





TYPE	PART#	PRICE
SINGI F-FNDFD	A2247-1-OF	180.00





	TYPE	PART #	PRICE
	SINGLE-ENDED / 50 C	Ohms A3062-1-QF	445.00
Ø 2.16	1.71		
	TYPE	PART #	PRICE
	DOUBLE-ENDED	A2604-1-OF	315 00












SMA 700 Volts DC / 1 Amp

Air-side Connector Included

WELDABLE

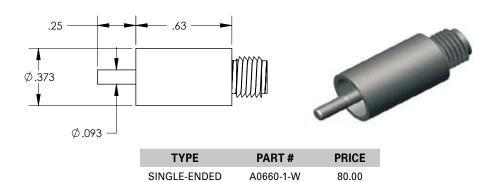

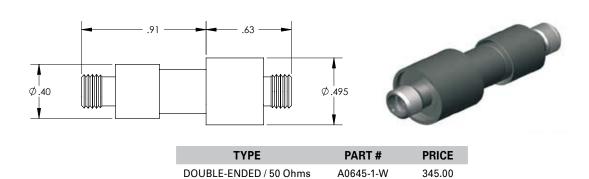

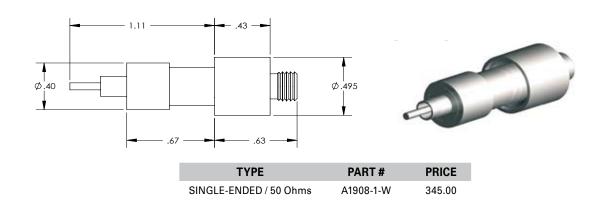













SMA

700 Volts DC / 1 Amp Air-side Connector Included


CONFLAT FLANGE

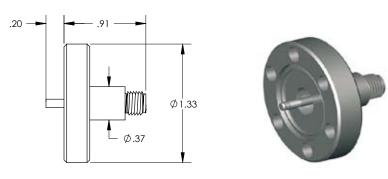

TYPE	PART #	PRICE
SINGLE-ENDED	Δ1911-2-CF	180 00

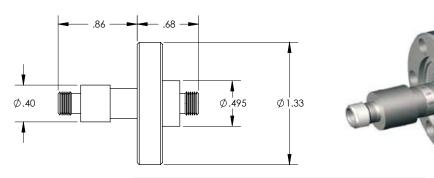

TYPE PART# PRICE DOUBLE-ENDED / 50 Ohms A1835-1-CF 445.00

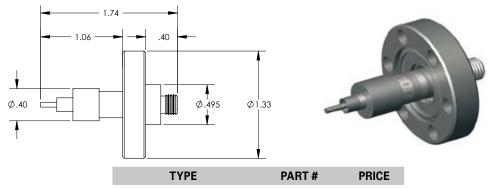

SINGLE-ENDED / 50 Ohms A1921-1-CF 445.00











SMA 700 Volts DC / 1 Amp Air-side Connector Included

Air-side Connector Included
CONFLAT FLANGE






TYPE	PART #	
SINGI F-FNDFD	A1911-1-CF	





190.00

TYPE	PART#	PRICE
DOUBLE-ENDED / 50 Ohms	A2286-1-CF	455.00





TYPE	PART #	PRICE
SINGLE-ENDED / 50 Ohms	A1910-1-CF	455.00

See Section 7 for connectors, wiring, and other accessories.











SMA

700 Volts DC / 1 Amp Air-side Connector Included

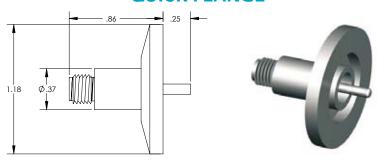


TYPE	PART #	PRICE
SINGLE-ENDED	A1920-1-OF	180 00





TYPE	PART#	PRICE
DOUBLE-ENDED / 50 Ohms	A2127-1-OF	445 00





TYPE	PART#	PRICE
SINGLE-ENDED / 50 Ohme	Λ1022-1-ΩE	445.00










SMA

700 Volts DC / 1 Amp Air-side Connector Included


WELDABLE





TYPE	PART #	PRICE
SINGLE-ENDED	A1980-1-W	250.00

CONFLAT FLANGE




SINGLE-ENDED

QUICK FLANGE

A1983-1-CF

350.00

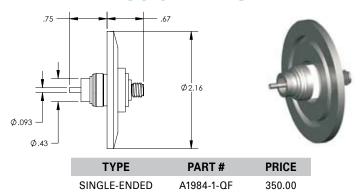












MICRODOT

500 Volts DC / 2 Amps

Air-side Connector Included


WELDABLE






TYPE	PART #	PRICE
SINGLE-ENDED	A1634-1-W	90.00

CONFLAT FLANGE



TYPE PART # PRICE SINGLE-ENDED A1648-1-CF 140.00

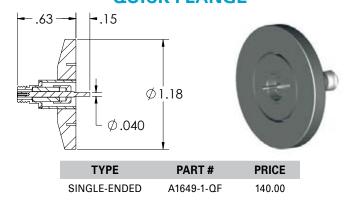












500 Volts DC / 2 Amps

Air-side Connector Included

BNC to Microdot / Crystal Sensor Feedthrough WELDABLE



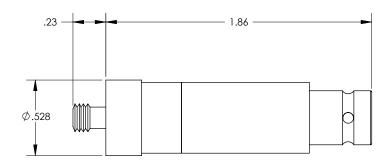

TYPE	PART #	PRICE
SINGLE-ENDED	A0975-1-W	215.00













500 Volts DC / 2 Amps

Air-side Connector Included


BNC to Microdot / Crystal Sensor Feedthrough

CONFLAT FLANGE





PART #	FIG	COAX	COOLING LINES	FLANGE	PRICE
A2554-1-CF	1	1		1.33 CF	285.00
A2750-1-CF	2	1		2.75 CF	295.00

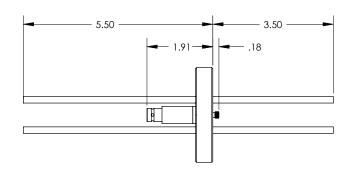



PART#	COAX	COOLING LINES	FLANGE	PRICE
A2728-1-CF	1	2	2.75 CF	355.00












500 Volts DC / 2 Amps

Air-side Connector Included

BNC to Microdot / Crystal Sensor Feedthrough BASEPLATE

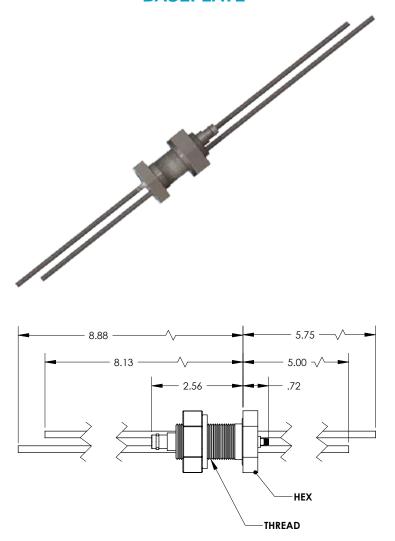

PART#	COAX	COOLING LINES	MOUNT	PRICE
A7164-1-RP	1	2	1" RP	325.00












500 Volts DC / 1 Amp

Air-side Connector Included

Type N to SMA

WELDABLE

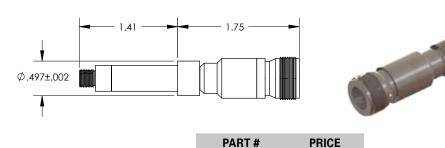

A3888-1-W

CONFLAT FLANGE

355.00

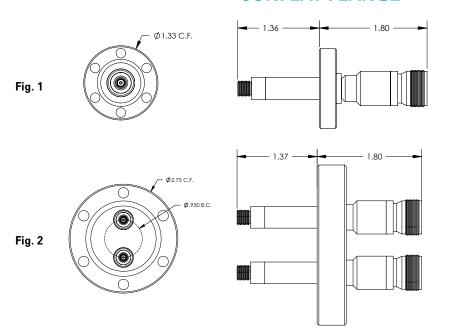




FIG	FLANGE	PART #	PRICE
1	1.33 CF	A8223-1-CF	455.00
2	2.75 CF	A3892-1-CF	850.00







500 Volts DC / 1 Amp Air-side Connector Included

Type N to SMA

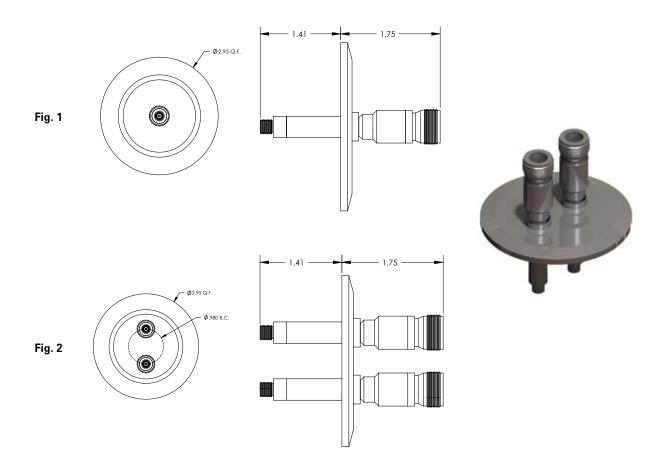


FIG	FLANGE	PART #	PRICE
1	QF 50	A8224-1-QF	455.00
2	QF 50	A8224-2-QF	850.00







