




Your Ideal Vacuum Pump

---

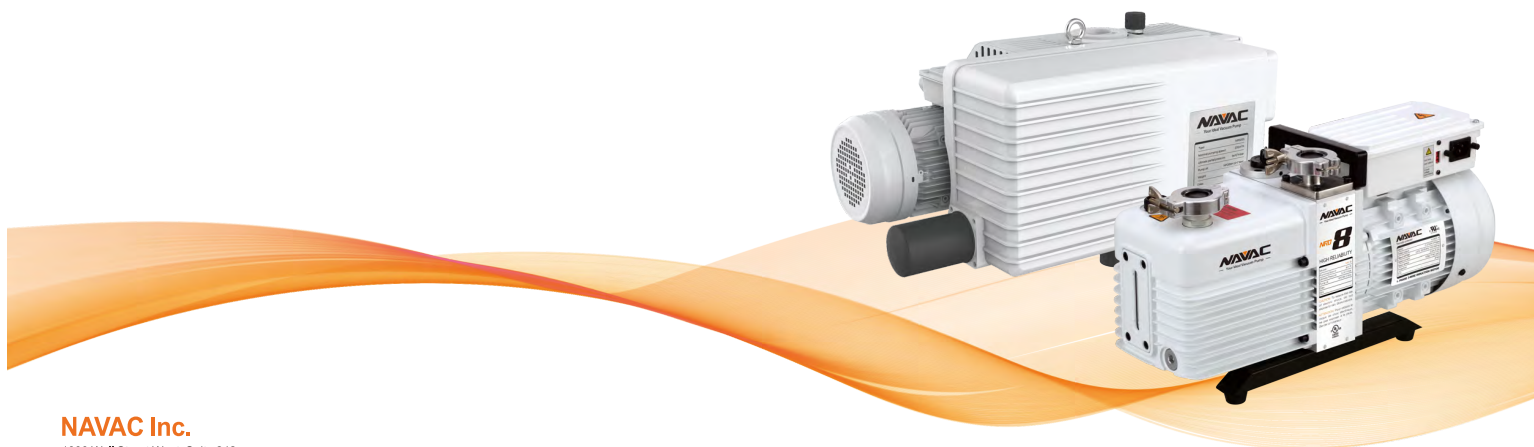

**NAVAC Inc.**

1099 Wall Street West, Suite 242  
Lyndhurst, NJ 07071  
T +1 201.939.6699  
F +1 201.939.3899  
Info@NavacGlobal.com  
www.NavacGlobal.com

**High Reliability**

Speed • Innovation • Quality

**Your Ideal Vacuum Pump**

Speed • Innovation • Quality

**NAVAC**




**High Reliability**  
Speed • Innovation • Quality

**NAVAC**

**NRS**

Single Stage Oil Sealed Rotary Vane Vacuum Pump

**Perfect Design and Performance**

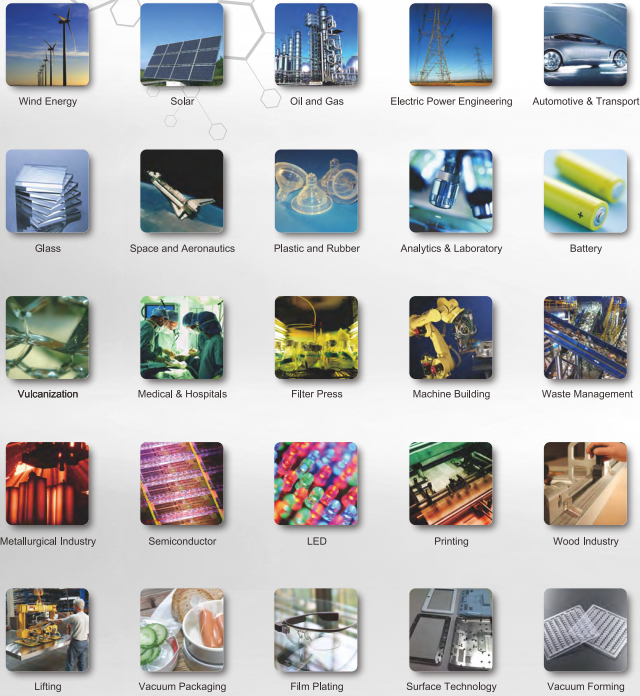

Seals made from FPM improving the anti-corrosion performance and preventing oil leakage issues.



High efficiency oil mist filters prevent oil vapor exhausting into the equipment space and smoking while also prolonging the service life.



Gas ballast helps to evacuate more vapor



Integrated anti-suckback valve


## High Reliability

Speed • Innovation • Quality

### Features

- ✓ High efficiency oil mist filters prevent oil vapor exhausting into the equipment space and smoking while also prolonging the service life.
- ✓ Sealing parts are made from fluororubber (FPM) improving the anti-corrosion performance and preventing oil leakage issues.
- ✓ Japanese Mori Seiki Horizontal CNC machining guarantees high reliability and precision.
- ✓ Unique industrial design yields elegant appearance.
- ✓ Integrated pump and motor design.

### Flow Rate Characteristic

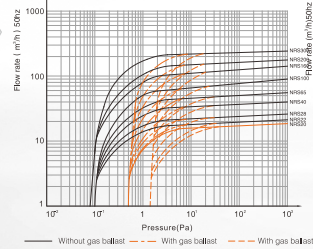

**NRS100**

**NAVAC**

## NRS

Single Stage Oil Sealed Rotary Vane Vacuum Pump

Specification		NRS20	NRS22	NRS28	NRS40	NRS65
Displacement speed	m³/h (50Hz)	20	22	23	40	65
	cfm (60Hz)	14	16	20	28	46
	pa	100	30	30	30	30
Ultimate pressure (total)	torr	7.5×10 <sup>2</sup>	2.25×10 <sup>2</sup>	2.25×10 <sup>2</sup>	2.25×10 <sup>2</sup>	2.25×10 <sup>2</sup>
	In.Hg	30	9	9	9	9
	mbar	0.5	0.5	0.5	0.5	0.5
Ultimate pressure - GB I	torr	3.75×10 <sup>2</sup>	3.75×10 <sup>2</sup>	3.75×10 <sup>2</sup>	3.75×10 <sup>2</sup>	3.75×10 <sup>2</sup>
	mbar	1.5	1.5	1.5	1.5	1.5
	torr	1.125	1.125	1.125	1.125	1.125
Water vapor tolerance - GB I	mbar	15	15	15	15	15
	torr	11	11	11	11	11
	kg/h	0.2	0.2	0.3	0.4	0.5
Water vapor tolerance - GB II	mbar	30	30	30	30	30
	torr	22	22	22	22	22
	kg/h	0.4	0.4	0.5	0.8	1.0
Power rating	kw	0.75	1.1	1.1	1.1	1.5
	hp	1	1.5	1.5	1.5	2
	rpm (50Hz)	1440	1440	1440	1440	1440
Motor speed	rpm (60Hz)	1720	1720	1720	1720	1720
	litres	0.5	1	1	2	2
	Oil type (NPO)	46H	68H	68H	68H	68H
Inlet and exhaust flange	G3/4"	G3/4"	G3/4"	G3/4"	G1-1/4"	G1-1/4"
	dB	65	58	58	59	61
	Ambient Temperature	°C	10-40	10-40	10-40	10-40
Net weight	kg	20	30	30	40	43
	lbs	44	66	66	88	95
	mm	317×249×219	496×268×248	496×268×248	555×304×268	555×311×268
Dimensions	in	12.5×9.8×8.6	12.5×10.6×9.8	12.5×10.6×9.8	21.9×12×10.6	21.9×12.2×10.6

Specification		NRS100	NRS160	NRS200	NRS300
Displacement speed	m³/h (50Hz)	100	160	200	300
	cfm (60Hz)	70	113	140	212
	pa	30	8	8	8
Ultimate pressure (total)	torr	2.25×10 <sup>2</sup>	6×10 <sup>2</sup>	6×10 <sup>2</sup>	6×10 <sup>2</sup>
	In.Hg	9	3	3	3
	mbar	0.5	0.5	0.5	0.5
Ultimate pressure - GB I	torr	3.75×10 <sup>2</sup>	3.75×10 <sup>2</sup>	3.75×10 <sup>2</sup>	3.75×10 <sup>2</sup>
	mbar	1.5	1.5	1.5	1.5
	torr	1.125	1.125	1.125	1.125
Water vapor tolerance - GB I	mbar	15	30	30	30
	torr	11	22	22	22
	kg/h	0.8	2.4	2.8	3.8
Water vapor tolerance - GB II	mbar	30	50	50	50
	torr	22	37	37	37
	kg/h	1.6	4.0	4.8	6.4
Power rating	kw	2.2	4	4	5.5
	hp	3	5.4	5.4	7.4
	rpm (50Hz)	1440	1440	1440	1440
Motor speed	rpm (60Hz)	1720	1720	1720	1720
	litres	5	7	7	9
	Oil type (NPO)	68H	68H	68H	68H
Inlet and exhaust flange	G1-1/4"	G2"	G2"	G2"	G2"
	dB	62	70	70	71
	Ambient Temperature	°C	10-40	10-40	10-40
Net weight	kg	70	143	143	197
	lbs	155	316	316	435
	mm	703×406×296	930×533×436	930×533×436	1035×440×434
Dimensions	in	27.7×16×11.3	36.6×21×17.2	36.6×21×17.2	40.7×21.3×17.1

**High Reliability**  
Speed • Innovation • Quality

**NRD**

Dual Stage Oil Sealed Rotary Vane Vacuum Pump

**Perfect Design and Performance**



**Refrigeration Industry**

Refrigerant charging, A/C, helium leak detection, helium recovery systems, etc...



**Medical Industry**

Plasma sterilizers, vacuum freeze drying, vacuum mixing, NRD M Series available to handle large amounts of H<sub>2</sub>O<sub>2</sub> gas and water vapor.



**Analytical Instruments**

Mass spectrometry, SEM, Helium Leak Detection, Analytical Equipment in Chemistry.




**Power Industry**

Transformer drying, Solar Cell Production, etc...



**Electronics, Semi-Conductor Industry**

Sf<sub>6</sub> gas recovery, vacuum oven, glovebox, sapphire and polycrystalline furnace, vacuum annealing/heat treatment, plasma cleaning, thin film vacuum coatings, backing high vacuum or roots systems.

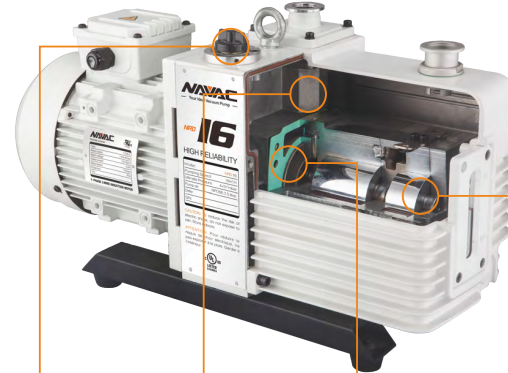


**Two-shift adjustable gas ballast valve**  
allows for the different requirements of condensable gas to be exhausted.



**Dual automatic anti-suckback design**  
Protects vacuum system from oil contamination in the event of an unexpected shut down



**Forced oil circulation system**  
ensures stable running of the pump



**Integrated cylinder structure and pin connection**  
convenient and accurate for maintenance and inspection




## High Reliability

Speed • Innovation • Quality

### Features

- ✓ **Gas Ballast**  
Adjustable gas ballast allows for the different requirements of condensable gas to be exhausted.
- ✓ **Oil**  
High quality mineral oil provided standard with the pump. All models can also be prepped for PFPE.
- ✓ **Anti Suck Back Design**  
Protects vacuum system from oil contamination in the event of an unexpected shut down.

Flow Rate Characteristic

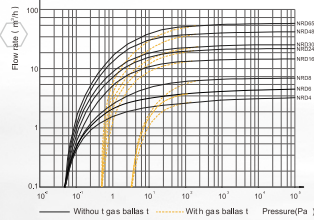

NRD8



## NRD

### Dual Stage Oil Sealed Rotary Vane Vacuum Pump

Specification		NRD4	NRD6	NRD8	NRD16
Displacement speed	m <sup>3</sup> /h (50Hz)	4	6	8	16
	cfm (60Hz)	2.8	4.2	5.6	11.3
Ultimate pressure (total)	pa	5 × 10 <sup>-2</sup>	5 × 10 <sup>-2</sup>	5 × 10 <sup>-2</sup>	4 × 10 <sup>-2</sup>
	torr	3.75 × 10 <sup>-2</sup>	3.75 × 10 <sup>-2</sup>	3.75 × 10 <sup>-2</sup>	3.0 × 10 <sup>-2</sup>
	mbar	5 × 10 <sup>-2</sup>	5 × 10 <sup>-2</sup>	5 × 10 <sup>-2</sup>	4 × 10 <sup>-2</sup>
Ultimate pressure GB (total)	pa	3	3	3	8 × 10 <sup>-1</sup>
	torr	2.25 × 10 <sup>-1</sup>	2.25 × 10 <sup>-1</sup>	2.25 × 10 <sup>-1</sup>	6.0 × 10 <sup>-1</sup>
Water vapor tolerance	mbar	30	30	30	25
Water vapor capacity	kg/h	0.1	0.1	0.2	0.3
Power rating	kw	0.4	0.4	0.4	0.75
	hp	0.5	0.5	0.5	1
Motor speed	rpm (50Hz)	1440	1440	1440	1440
	rpm (60Hz)	1720	1720	1720	1720
Oil capacity	litres	1	1	1	1.5
Oil type (NPO)		46H	46H	46H	68H
Inlet and exhaust flange		KF16	KF16	KF16	KF25
Noise level	dB	56	56	56	58
	°C	5-40	5-40	5-40	5-40
Net weight	kg	19	20	20	33
	lbs	42	44	44	73
Dimensions	mm	460 × 144 × 207	460 × 144 × 207	460 × 144 × 207	520 × 188 × 272
	inch	18.1 × 5.6 × 8.1	18.1 × 5.6 × 8.1	18.1 × 5.6 × 8.1	20.5 × 7.4 × 10.7

Specification		NRD24	NRD30	NRD48	NRD65
Displacement speed	m <sup>3</sup> /h (50Hz)	24	30	48	65
	cfm (60Hz)	17	21.2	34	46
Ultimate pressure (total)	pa	4 × 10 <sup>-2</sup>	4 × 10 <sup>-2</sup>	4 × 10 <sup>-2</sup>	4 × 10 <sup>-2</sup>
	torr	3.0 × 10 <sup>-2</sup>	3.0 × 10 <sup>-2</sup>	3.0 × 10 <sup>-2</sup>	3.0 × 10 <sup>-2</sup>
	mbar	4 × 10 <sup>-2</sup>	4 × 10 <sup>-2</sup>	4 × 10 <sup>-2</sup>	4 × 10 <sup>-2</sup>
Ultimate pressure GB (total)	pa	8 × 10 <sup>-1</sup>	8 × 10 <sup>-1</sup>	8 × 10 <sup>-1</sup>	8 × 10 <sup>-1</sup>
	torr	6.0 × 10 <sup>-1</sup>	6.0 × 10 <sup>-1</sup>	6.0 × 10 <sup>-1</sup>	6.0 × 10 <sup>-1</sup>
Water vapor tolerance	mbar	25	25	20	20
Water vapor capacity	kg/h	18	18	15	15
Power rating	kw	1.1	1.1	1.5	2.2
	hp	1.5	1.5	2	3
Motor speed	rpm (50Hz)	1440	1440	1440	1440
	rpm (60Hz)	1720	1720	1720	1720
Oil capacity	litres	2	2	4	4
Oil type (NPO)		68H	68H	100H	100H
Inlet and exhaust flange		KF25	KF25	KF40	KF40
Noise level	dB	58	58	62	62
	°C	5-40	5-40	5-40	5-40
Ambient Temperature	kg	35	37	62	65
	lbs	77	82	137	143
Dimensions	mm	560 × 188 × 272	560 × 188 × 272	720 × 234 × 358	720 × 234 × 358
	inch	20.5 × 7.4 × 10.7	20.5 × 7.4 × 10.7	28.3 × 9.2 × 14.1	28.3 × 9.2 × 14.1


## High Reliability

Speed • Innovation • Quality

### Features

- ✓ **Gas Ballast**  
Adjustable gas ballast allows for the different requirements of condensable gas to be exhausted.
- ✓ **Oil**  
High quality mineral oil provided standard with the pump. All models can also be prepped for PFPE.
- ✓ **Anti Suck Back Design**  
Protects vacuum system from oil contamination in the event of an unexpected shut down.

### Flow Rate Characteristic

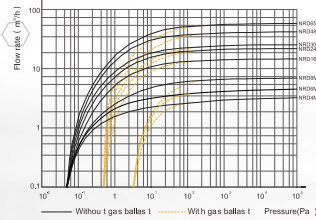

## NRD8M

### ✓ Mild Corrosion Resistant

NRD M Series pumps are designed to perform in mildly corrosive applications such as H<sub>2</sub>O<sub>2</sub>.



## NRD M

Dual Stage Oil Sealed Rotary Vane Vacuum Pump

Specification		NRD8M	NRD16M	NRD30M
Displacement speed	m <sup>3</sup> /h (50Hz)	8	16	30
	cfm (60Hz)	5.6	11.3	21.2
Ultimate pressure (total)	pa	5 × 10 <sup>3</sup>	4 × 10 <sup>3</sup>	4 × 10 <sup>3</sup>
	torr	3.75 × 10 <sup>3</sup>	3.0 × 10 <sup>3</sup>	3.0 × 10 <sup>3</sup>
	mbar	5 × 10 <sup>3</sup>	4 × 10 <sup>3</sup>	4 × 10 <sup>3</sup>
Ultimate pressure GB (total)	pa	3	8 × 10 <sup>2</sup>	8 × 10 <sup>2</sup>
	torr	2.25 × 10 <sup>2</sup>	6.0 × 10 <sup>2</sup>	6.0 × 10 <sup>2</sup>
	mbar	30	25	25
Water vapor tolerance	torr	22	18	18
Water vapor capacity	kg/h	0.2	0.3	0.6
	kw	0.4	0.75	1.1
Power rating	hp	0.5	1	1.5
Motor speed	rpm (50Hz)	1440	1440	1440
	rpm (60Hz)	1720	1720	1720
Oil capacity	litres	1	1.5	2
Oil type (NPO)		46H	68H	68H
Inlet and exhaust flange		KF16	KF25	KF25
	Noise level	dB	56	58
Ambient Temperature	°C	5-40	5-40	5-40
Net weight	kg	20	33	37
	lbs	44	73	82
Dimensions	mm	460 × 144 × 207	520 × 188 × 272	560 × 188 × 272
	inch	18.1 × 5.6 × 8.1	20.5 × 7.4 × 10.7	20.5 × 7.4 × 10.7




**High Reliability**  
Speed • Innovation • Quality



## Spare Parts


Your Ideal Vacuum Pump

### Dimension

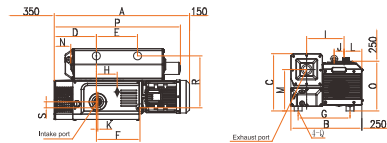

#### Dimensions (inch)

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	Inlets port	Exhaust port
NRS20	12.5	9.8	8.6	2.8	5.5	4.3	5.2	7	127.5	7	14	5	6.2	0.7	7.2	11.9	MB	5.0	0.2	G1/2"	G3/4"
NRS22	19.5	10.5	9.8	4.4	8.7	11.8	7.5	4.2	146	25	20	5.7	7.2	1.1	8	15.4	MB	7.6	1.4	G3/4"	G3/4"
NRS28	19.5	10.5	9.8	4.4	8.7	11.8	7.5	4.2	146	25	20	5.7	7.2	1.1	8	15.4	MB	7.6	1.4	G3/4"	G3/4"
NRS40	21.8	12	10.6	5.9	8.5	7.9	9.3	2.3	179	51	5	7	8	1.3	9.9	18.3	MB	9.3	1.3	G1 1/4"	G1 1/4"
NRS65	21.8	12.2	10.6	5.9	8.5	7.9	10	2.3	189	51	5	7.4	8	1.3	9.9	18.3	MB	9.5	1.3	G1 1/4"	G1 1/4"
NRS100	27.7	16	11.3	6.5	8.9	8.9	12.6	5.2	226	42	27	8.9	8.7	2.4	11	22.8	M10	10.2	1.6	G1 1/4"	G1 1/4"
NRS160	36.6	21	17	10.4	9.9	12	15.5	4.4	298	66	32	11.7	12	5.3	15	36.6	M10	15.5	1.8	G2"	G2"
NRS200	36.6	21	17	10.4	9.9	12	15.5	4.4	298	66	32	11.7	12	5.3	15	36.6	M10	15.5	1.8	G2"	G2"
NRS300	40.7	21.3	17	12.8	12.3	13	15.5	6.3	284	75	11	11.2	12.4	6.2	14.8	38	M10	15.5	1.8	G2"	G2"

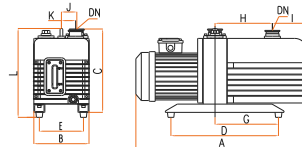


#### Dimensions (inch)

Model	A	B	C	D	D	E	G	H	I	J	K	L	DN
NRD4	18.1	5.7	8.1	8.1	8.3	4.3	5	6.1	1.8	1.8	1.3	/	KF16
NRD6	18.1	5.7	8.1	8.1	8.3	4.3	5	6.1	1.8	1.8	1.3	/	KF16
NRD8	18.1	5.7	8.1	8.1	8.3	4.3	5	6.1	1.8	1.8	1.3	/	KF16
NRD16	20.5	7.4	10.7	10.7	12.6	5.8	6.3	6.5	2.7	2.3	1.5	11.6	KF25
NRD24	22	7.4	10.7	10.7	12.6	5.8	6.3	7.3	3.2	2.3	1.9	11.6	KF25
NRD30	22	7.4	10.7	10.7	12.6	5.8	6.3	7.3	3.2	2.3	1.9	11.6	KF25
NRD48	28.7	9.2	14.1	14.1	15.6	7.5	7.9	8.8	6.2	2.7	2.2	15.4	KF40
NRD65	28.7	9.2	14.1	14.1	15.6	7.5	7.9	8.8	6.2	2.7	2.2	15.4	KF40

### Available Motor Specifications

	NRD4	NRD6	NRD8	NRD16	NRD24	NRD30	NRD48	NRD65
115-230V / 50-60Hz, 1ph	yes	yes	yes					
115V / 60Hz, 1ph				yes	yes	yes	yes	yes
230-460V / 50-60Hz, 3ph	yes	yes	yes	yes	yes	yes	yes	yes

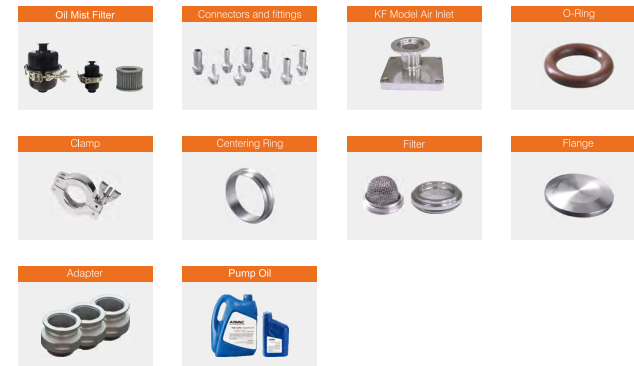



**High Reliability**  
Speed • Innovation • Quality



## Ordering info

Your Ideal Vacuum Pump

### NRS

Model	Product Description	Order No. VPO mineral oil
NRS4	115V, 60Hz, 1 ph	N20041001
NRS8	115V, 60Hz, 1 ph	N20081001
NRS10	115V, 60Hz, 1 ph	N20101001
NRS16	115V, 60Hz, 1 ph	N20161001
NRS20	115V, 60Hz, 1 ph	N20201001
	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N20201002
NRS22	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N20221001
NRS28	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N20281001
NRS40	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N20401001
NRS65	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N20651001
NRS100	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N201001001
NRS160	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N201601001
NRS200	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N202001001
NRS300	200-220/380-415V, 50Hz, 3 ph	N203001001

### Oil and others

Model	Product Description	Order No.
Oil	NPO46H02 (0,5 liter bottle, for NRS20)	NPO46H02
	NPO68H (1 liter bottle for NRS22/28/40/65/100/160/200/300)	NPO68H
Service kit	for NRS20	NSK20
	for NRS22	NSK22
	for NRS28	NSK28
	for NRS40	NSK40
	for NRS65	NSK65
	for NRS100	NSK100
	for NRS160	NSK160
	for NRS200	NSK200
	for NRS300	NSK300

### NRD

Model	Product Description	Order No. VPO mineral oil	Order No. PFPE oil not included
NRD4	115/230V, 50/60Hz, 1 ph, set to 115V	N10041001	N10042001
	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10041002	N10042002
NRD6	115/230V, 50/60Hz, 1 ph, set to 115V	N10061001	N10062001
	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10061002	N10062002
NRD8	115/230V, 50/60Hz, 1 ph, set to 115V	N10081001	N10082001
	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10081002	N10082002
NRD16	115V, 60Hz, 1 ph	N10161001	N10162001
	230V, 50Hz, 1 ph	N10161002	N10162002
	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10161003	N10162003
NRD24	115V, 60Hz, 1 ph	N10241001	N10242001
	230V, 50Hz, 1 ph	N10241002	N10242002
	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10241003	N10242003
NRD30	115V, 60Hz, 1 ph	N10301001	N10302001
	230V, 50Hz, 1 ph	N10301002	N10302002
	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10301003	N10302003
NRD48	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10481001	N10482001
NRD65	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10651001	N10652001

**High Reliability**  
Speed • Innovation • Quality



## Ordering info

Your Ideal Vacuum Pump

### NRD M

Model	Product Description	Order No. VPO mineral oil	Order No. PPPE oil not included
NRD8	115/230V, 50/60Hz, 1 ph, set to 115V	N10081001M	N10082001M
	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10081002M	N10082002M
NRD16	115V, 60Hz, 1 ph	N10161001M	N10162001M
	230V, 50Hz, 1 ph	N10161002M	N10162002M
	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10161003M	N10162003M
NRD24	115V, 60Hz, 1 ph	N10241001M	N10242001M
	230V, 50Hz, 1 ph	N10241002M	N10242002M
NRD30	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10241003M	N10242003M
	115V, 60Hz, 1 ph	N10301001M	N10302001M
	230V, 50Hz, 1 ph	N10301002M	N10302002M
NRD48	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10301003M	N10302003M
	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10481001M	N10482001M
NRD65	200-220/380-415V, 50Hz, 200-230/460V, 60Hz, 3 ph	N10651001M	N10652001M

### Oil and others

Model	Product Description	Order No.
Oil	NPO46H (1 liter bottle, for NRD4/6/8)	NPO46H
	NPO68H (1 liter bottle, for NRD16/24/30 and NRS22/28/40/65/100/160/200/300)	NPO68H
	NPO100H (one 4-liter bottle, for NRD48/65)	NPO100H
Oil mist filter	NOT8A (KF16, for NRD4/6/8)	NOT8A
	NOT8B (KF25, for NRD4/6/8)	NOT8B
	NOT30B (KF25, for NRD16/24/30)	NOT30B
	NOT65C (KF40, for NRD48/65)	NOT65C
Service kit	for NRD4	NSK4
	for NRD6	NSK6
	for NRD8	NSK8
	for NRD16	NSK16
	for NRD24	NSK24
	for NRD30	NSK30
	for NRD48	NSK48
	for NRD65	NSK65
Service kit	for NRD8M	NSK8M
	for NRD16M	NSK16M
	for NRD24M	NSK24M
	for NRD30M	NSK30M
	for NRD48M	NSK48M
	for NRD65M	NSK65M